


APPROXIMATE DIMENSIONS SHOWN IN INCHES,
MILLIMETER DIMENSIONS ().

INSIDE DEPTH: 4.0 (REF) (102)

#10-32 STAINLESS STEEL SCREWS CAPTIVATED IN COVER

L-1155A

L-1156-1, L-1156-4, or L-1156-1*

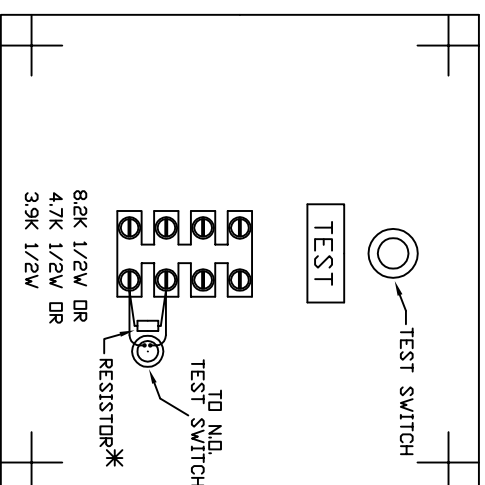


PANEL DETAIL
4.8 x 4.8 (REF)
(124) (124)
MOUNTED INSIDE OF CABINET

THE ABOVE ENCLOSURE IS DESIGNED FOR USE IN HIGHLY CORROSIVE ATMOSPHERES. THE ENCLOSURE IS MOLDED FROM A REINFORCED POLYESTER MATERIAL WHICH HAS EXCELLENT CHEMICAL RESISTANCE

- *ELR-HD-1A-QC:
USE 8.2K RESISTOR AND APPLY LABEL L-1156-1
- *ELR-HD-4-QC:
USE 4.7K RESISTOR AND APPLY LABEL L-1156-4
- *ELR-HD-3.9-QC:
USE 3.9K RESISTOR AND APPLY LABEL L-1156-11

NEMA-4X ENCLOSURE (FIBERGLASS)
SKU# 400193

PANEL, ALUMINUM SKU# 400746
SWITCH, N.D. SKU# 500417

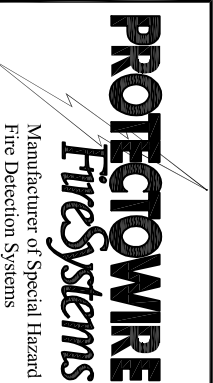

ELR-HD-1A-QC (N4X)
ELR-HD-4-QC (N4X)
ELR-HD-3.9-QC (N4X)
CABINET & ENGRAVING DETAIL

DATE	REVISION	DWN:	CHKD:	APPD:
1/2012	USE REF. DIMS & GENERAL	MCS		
2/2014	ADD ELR-HD-4-QC			
11/16	ADD ELR-HD-3.9-QC			

DATE: 3-11-93 SCALE: NTS TOL:

THE PROTECTOWIRE CO., INC. Plymouth, Massachusetts DWG NO: EN1137G