

ELR-HD-1A-QC


End-of-Line Fiberglass NEMA-4X Enclosure w/ Test Switch and Compression Terminals (8.2k Resistor)

Features

- Fiberglass NEMA-4X (IP66) end-of-line box with test switch and PWSC compression terminals.
- Heavy Duty Enclosure
- Dimensions: H 6" x W 6" x D 4"
- Compatible with SRP-4x4 and 2600HD ZM-2 modules (8.2k ELR)
- Operating temperature -40°F to +266°F (-40°C to +130°C)

The illustration below depicts a typical wiring dressing of an ELR-HD-1A End-of-Line Resistor in a Class B detection circuit of a fire alarm system using Protectowire as the detector. This ELR unit is furnished with quick connect terminals which makes it possible to fasten the detector directly to the terminals. All bends in the Protectowire should have a radius of at least 2.5in (6.4cm). For further information on detector splicing see diagram provided with splicing sleeves and in installation guide for Protectowire.

This End-of-Line Resistor is furnished with a Test Button. When the button is pressed the detection circuit to which it is connected will be placed in an alarm condition.

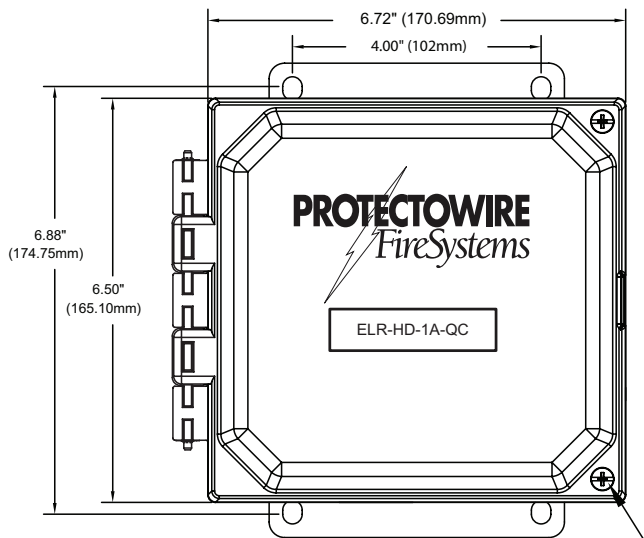


DEPTH: 5.18" (131.57mm)

INSIDE DIMENSIONS APPROX. 6x6x4

(2) EACH #10-32 BRASS INSERTS AND STAINLESS STEEL CAPTIVE COVER SCREWS

MOUNTING PANEL DETAIL
4.81" x 4.81"
(122.24mm) x (122.24mm)
MOUNTED INSIDE OF CABINET

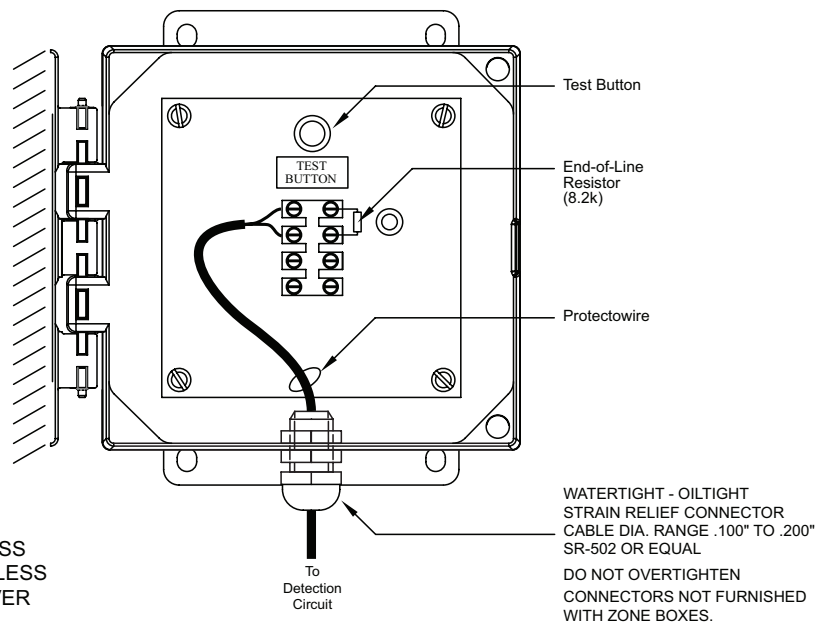

SR-502 Series Strain Relief Connectors sold separately
INSTALL IN ACCESSIBLE LOCATION PREFERABLY NOT MORE THAN SIX FEET ABOVE THE FLOOR.

The above enclosure is designed for use in highly corrosive atmospheres. The enclosure is molded from a reinforced polyester material which has excellent chemical resistance.

Weight: 2.0 Lbs.