


SR-505 Strain Relief Connector

Protectowire Linear Heat Installation Accessories

Features

- Designed for use with Protectowire retractable cable (MS-3091T)
- Water tight/Oil Tight
- UL listed NEMA 4/6P when installed into an NPT threaded entry or UL listed conduit hub
- Rated at 194° F (90° C)
- Cable outer jacket diameter range: 0.400" - 0.500" (10.2 - 12.7mm)
- Material: Zinc plated Steel
- PVC Grommets

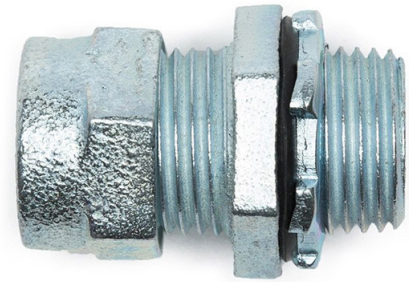

PART DESCRIPTION	THREAD TYPE & SIZE	FIT THREAD SIZES	DIMENSIONS – INCHES (MM)			
			A BODY LENGTH	B THREAD LENGTH	C1/C2 WRENCHING FLATS	CLEARANCE HOLE
DOME FITTING	1/2" NPT	N/A	1-3/16 (30.1625)	9/16 (14.2875)	1.0 (25.4) 1-1/16 (27.0)	27/32 (21.30)
LOCKING NUT	1/2" NPT	N/A	N/A	N/A	1-1/16 (27.0)	N/A
O-RING	N/A	1/2" NPT	N/A	N/A	N/A	N/A

All dimensions approximate: inch [mm]
Subject to change with or without notice
Not to scale

TORQUE 1.5 TO 3 TURNS PAST FINGER TIGHT

